

2012-2016 Honda CBR1000RR Fender Eliminator Kit

Parts List

x1 License plate holder
 x1 Cover plate
 x1 Lock plate
 x1 License plate LED light
 x1 License plate light harness adapter
 x1 M6x12mm bolts
 x1 M6x30mm bolts
 x4 M6x16mm bolts
 x7 M6 nylon lock nuts
 x3 M6 washers
 x4 M6 large OD washers
 x1 M8x35mm bolt
 x1 M8 washer
 x1 M8 nylon lock nut
 x2 Factory signal adapters
 x2 Aftermarket signal adapters

1. Rear fender disassembly: Remove nut holding the reflector and remove along with spacer. Remove 2 bolts (1 on each side) holding the license plate bracket and drop it down. Disconnect the left and right turn signal plugs and license plate light plug. Unbolt 2 screws holding the license plate light assembly housing and remove. Optional: Remove the factory turn signals 1 nut and pull out.

2. Remove rear seat and unbolt the 3 bolts from up top that holds the fender to the undertail. Remove the 3 spacers. These bolts and spacers will no longer be used.

3. Drop the fender down, carefully separate it in half and pull out the wire harness hidden inside. Relocate this entire harness back up into the trunk area.

4. Assemble the license plate holder and cover plate using the M6x12mm and M6x30mm bolt, washers and lock nuts. See illustration to right. Take note of the hole where each bolt is used.


5. Mount the LED plate light to the license plate holder and run the wire through the elongated slot up top.

Optional: install turn signals see steps below

6. Mount the assembly from step 3 to the plastic undertail using the lock plate with the M8x35mm bolt, M8 washer and M8 lock nut. Additionally secure it with the M6 lock nut and washer to the protruding M6x30 bolt. Route wires through opening on lock plate making sure not to crush the wires. See illustration to right.

7. Connect the license plate light harness adapter to the LED plate light (white>black and black>red) and connect it back to the bikes harness (white).

8. Mount the license plate using the four M6x16mm bolts, large OD washers, and lock nuts. Bolt>Plate>License plate holder>washer>nut

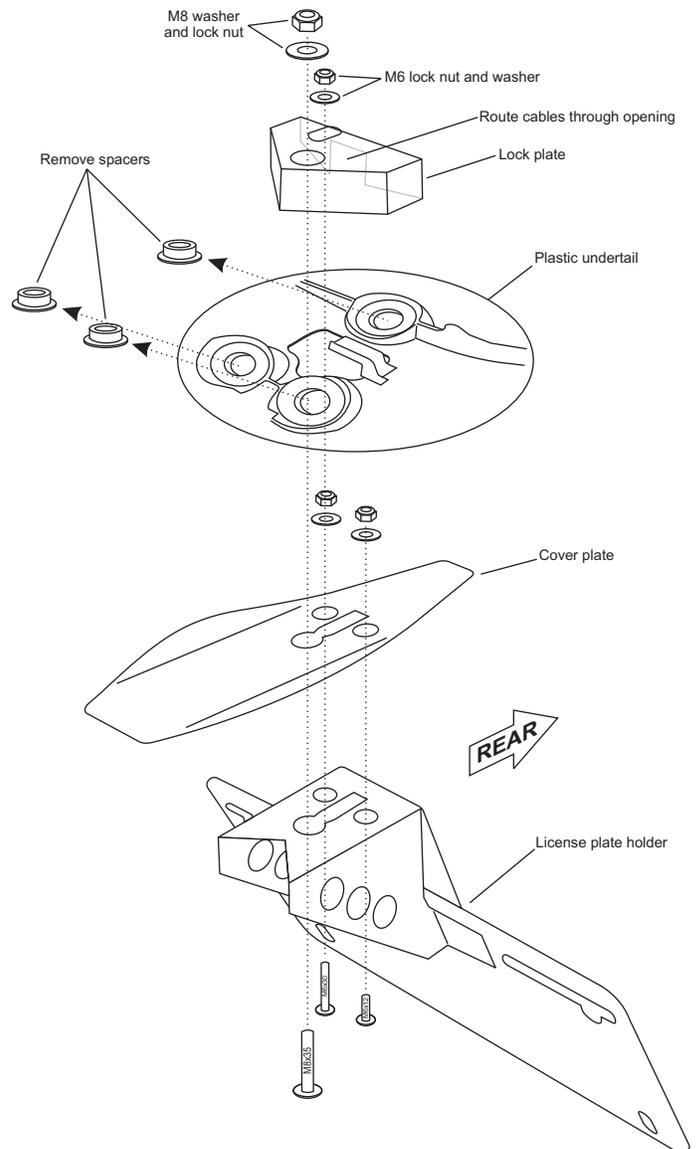

Installing with factory rear turn signals

1. Mount the factory turn signals to the factory turn signal adapter using the factory nut. Orange plug=Left, Blue plug=Right

2. Mount the entire assembly behind the license plate holder using same holes for the license plate

3. Route the wires through the center elongated slot through the larger opening and plug it back into the left and right turn signal plugs

Installing with aftermarket 10mm hole mount turn signals

1. Mount the 2 aftermarket turn signal adapters to the license plate holder upper hole.

2. Mount the aftermarket 10mm hole mount turn signals to adapter

3. Run the wires through the elongated slot and wire it to the bike

