



Kawasaki Ninja 300 2013-2017 Fender Eliminator Kit

[Version 1.2]


Parts List

x1 License plate holder
x1 License plate LED light
x1 License plate adapter harness
x4 6x16mm allen bolts
x8 6mm nylon lock nuts
x4 6mm washers
x4 6mm large OD washers
x2 Optional OEM signal adapters
x2 Optional aftermarket 10mm signal adapters

1. Remove rear seat
2. Remove L/R side fairing panels below main seat (1 screw on each side and pop out)
3. Remove main seat (1 screw from each side)
4. Remove L/R side fairings (4 plastic rivets up top and 2 screws from each side)
5. Remove center upper fairing (lift up and out)
6. Remove silver bracket to access wires below (2 screws)
7. Disconnect left and right turn signals (gray and black plugs) and the license plate light (2 wire black flat plug)
8. Remove rear fender (4 screws up top and pull out along with the cables – keep these screws to be reused later)
9. Attach license plate LED light to plate holder, and attach license plate adapter harness (black>black, white>white). Install the plate holder using the same screws in step 8 above and included washers and lock nuts in this kit. Route the wires through the center hole and plug it back into the appropriate plug removed from step 7 above.
10. Mount the license plate the plate holder using the 4 bolts, washers, and lock nuts from this kit.
11. Optional: Mount the OEM or aftermarket turn signal adapters to the license plate mounting holes on the plate holder using two 6x14mm allen bolts, large OD washers, and nuts. Install the OEM or aftermarket turn signals onto the adapter and route wires through center hole and plug into appropriate plug removed from step 7. Aftermarket signals require wiring.
Bolt>Plate>Plate holder>Adapter>Large OD Washer>Nut
11. Check all lighting

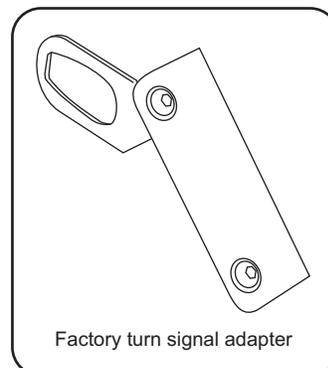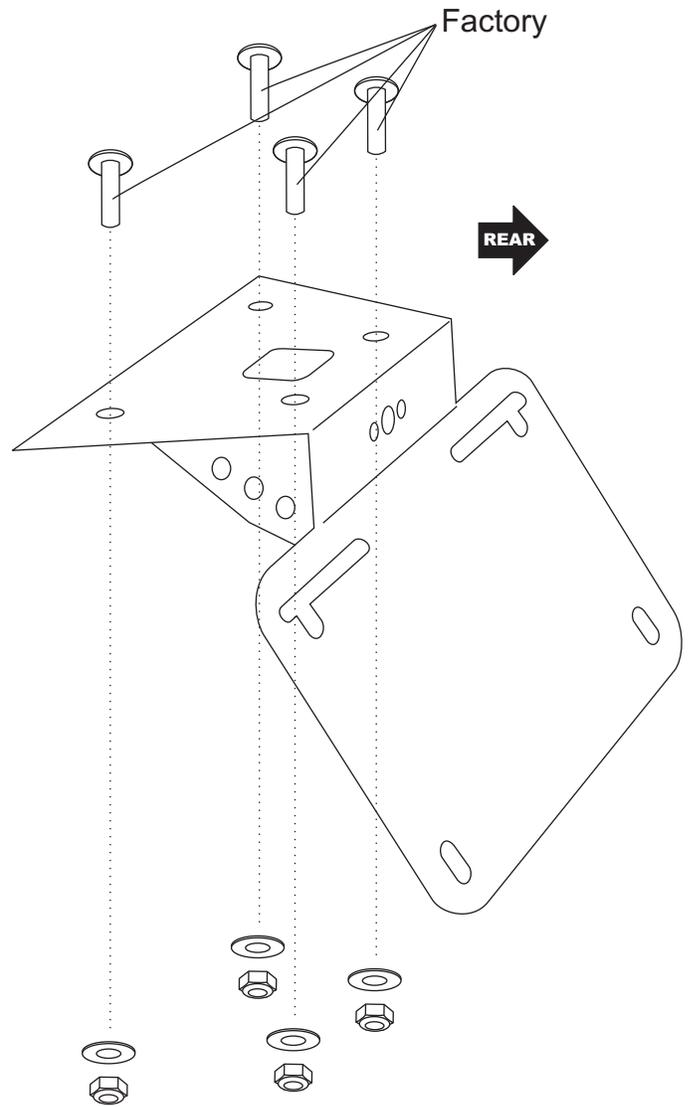

Factory turn signal adapter

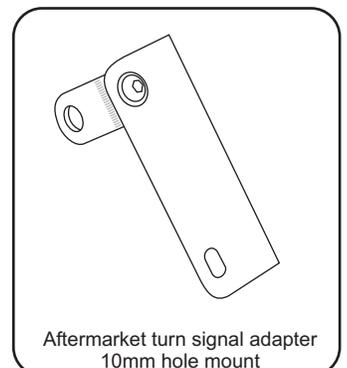

Aftermarket turn signal adapter
10mm hole mount