

2018-2022 Kawasaki Ninja 400/Z400 Fender Eliminator Kit

Part No. FE-K18N400

Parts List


x1 Plate holder	x4 M6x16mm bolts
x1 LED license plate light	x4 M6 large OD washers
x1 License plate light adapter harness	x4 M6 lock nuts
x4 M8x20mm bolts	x2 Aftermarket signal adapter bracket (in-hole)
x4 M8 washers	x1 Factory signal adapter brackets (L+R)
x4 M8 lock nuts	

Installing fender eliminator

1. Remove passenger seat (key)
2. Lift up on the trunk lid to reveal the boot shield containing the turn signals and license plate light plugs
3. Roll back the boot for easy access and unplug left and right turn signals as well as the license plate light and unroute them from the cable management grommet
4. Removing the rear fender (4 bolts from up top) then carefully drop down along with the 3 wire harnesses
5. Mount the LED license plate light onto the plate holder making sure the LED is facing down then attach the license plate adapter harness to the license plate light (white>white and black>black) then run the wire up through the rectangular opening.



OPTIONAL: Install external turn signals - see below

6. While feeding the license plate harness (and optional turn signal harnesses) up through the opening on the undertail mount the plate holder assembly to the bike using four M8x20mm bolts, M8 washers, and M8 lock nuts
7. Route and plug back in the license plate light and optional turn signal plugs
8. Close the trunk lid and reinstall passenger seat
9. Test all lighting before going on a road test

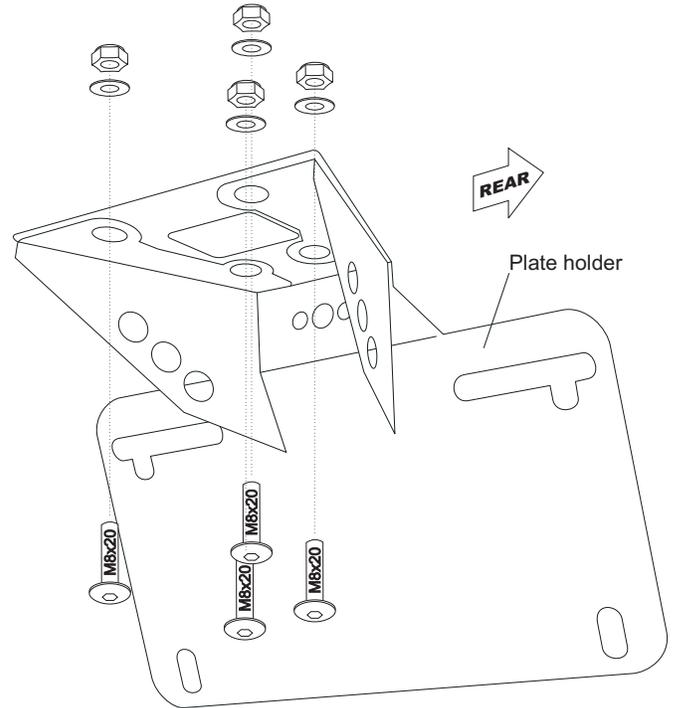

Installing factory turn signals

1. Disassemble rear fender (4 bolts with inserts - 2 behind plate and 2 up top) separate the metal sub fender from the plastic shell by un-threading all the wires
2. Remove factory turn signals from fender (1 philips screw, 1 locking plate, and 1 backing plate) then carefully pop the turn signal off and pull out the wires
3. Reinstall the turn signals onto the factory turn signal brackets.
4. Mount factory turn signal adapters to license plate mounting holes on plate holder using four M6x16mm allen bolts, M6 large OD washers, and M6 nuts. Bolt>License plate>Plate Holder>Adapter>Washer>Nut

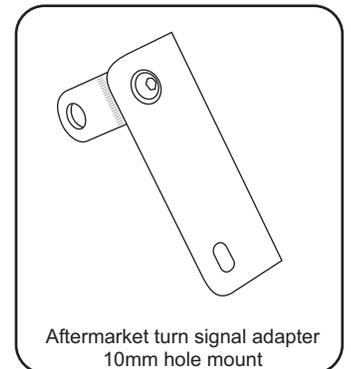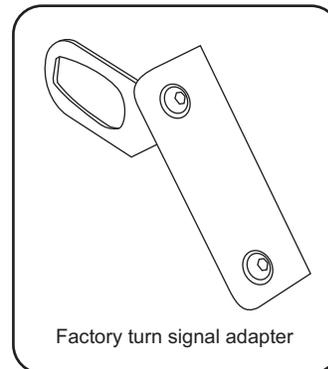

Installing aftermarket in-hole turn signals

1. Mount the aftermarket signal onto the aftermarket turn signal brackets, do not fully tighten
2. Mount the adapter on the upper holes of the license plate using two M6x16mm bolts, M6 larger OD washers and M6 lock nuts
3. Clock the turn signal so that it faces the rear, then tighten
4. Aftermarket turn signals will require additional wiring