

Yamaha FZ-07 2015-2017 Fender Eliminator Kit

[Version 1.2]

Parts List

x1 License plate holder
x1 Tail light cover
x1 License plate LED light
x1 License plate light adapter harness
x2 M6x12mm allen bolts
x4 M6x16mm allen bolts
x4 M6x20mm allen bolts
x6 M6 washers
x4 M6 large OD washers
x6 M6 nylon lock nuts
x2 Plastic rivets
x2 OEM signal adapters
x2 Aftermarket 10mm signal adapters

Recommended

Loctite or thread sealer

1. Remove both seats. Remove rear cover above tail light (2 bolts). Remove both side covers and center cover (6 screws/bolts from the top and 5 plastic rivets beneath). The 2 side panels will pull outwards allowing plastic under tail to be accessible.

2. Unplug left and right turn signal connectors as well as license plate light connector.

3. Unbolt factory rear fender. 4 bolts from beneath. These bolts are no longer needed. Pull out the fender along with the turn signal and license plate light wires. Note the plastic under tail can be removed at this point.

4. Mount tail light cover (padded side face up) to license plate holder using two (2) M6x12mm bolts, M6 washers and M6 lock nuts. Mount license plate holder to the bike using four (4) M6x20mm bolts and M6 washers. Apply a drop of loctite or thread sealer on these bolts. See illustration


5. Attach the LED license plate light to plate holder. Feed wires through hole on plate holder. Attach adapter harness to LED plate light (Red>White wire and Black>Black wire) and plug it back into bike removed from step 2.

6. Mount license plate to plate holder using four 6x16mm bolts, M6 large OD washers, and lock nuts from this kit.


7. Reverse steps to reinstall the side covers, under tail and upper tail light cover. Note: when installing the under tail replace the 2 rivets from this kit with the 2 middle rivets originally holding both the rear fender cover and under tail. See illustration on right.

8. Optional: Mount OEM or aftermarket turn signal adapters to license plate mounting holes on plate holder using two/four M6x16mm allen bolts, large OD washers, and nuts. Install OEM or aftermarket turn signals onto adapter and route wires through rear hole of the fender hole block plate and plug into appropriate plug removed from step 2. Aftermarket signals may require wiring. Refer to illustration on right to mount factory signals.


9. Check all lighting

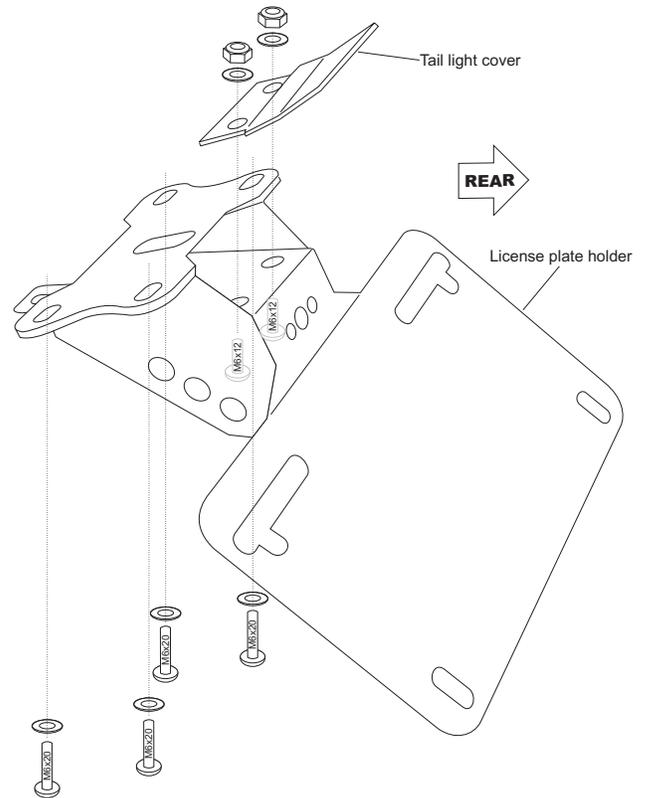

Replace these 2 rivets



Factory turn signal adapter



Aftermarket turn signal adapter
10mm hole mount