

Yamaha MT-07 2021-2023 Fender Eliminator Kit



Parts List

x1 License plate holder	x6 M6 washers
x1 Tail light cover	x4 M6 large OD washers
x1 License plate LED light	x6 M6 nylon lock nuts
x1 License plate light adapter harness	x2 Plastic rivets
x2 M6x12mm allen bolts	x2 OEM signal adapters* de-pin connector required - see
x4 M6x16mm allen bolts	video on website or youtube channel
x4 M6x20mm allen bolts	x2 Aftermarket 10mm signal adapters



Recommended

Loctite or thread sealer

1. Remove passenger seat
 2. Remove rear fender plastic winglet (2 plastic push rivets - these will no longer be used) pull down forward to remove, then remove the remaining 3 plastic push rivets for the center undertail cover
 3. From up top remove the trunk metal wire cover, pull up and back
 4. Remove the rider seat, 2 bolts at the rear
 5. Loosen and pull away painted/plastic side fairings. Each side: 1 bolt under the rider seat, 1 bolt near the tail light, 1 bolt in the middle (painted tab) and 1 bolt in the middle hidden under a rubber cover. Pull the rear of the fairing outwards (sideways) to release from rubber faster. Center undertail cover may fall so support before removal. Remove rubber tail light upper cover.
 6. Locate the left/right signals and license plate light plugs (white and grey 2-wire plugs) and unplug them. Undo the cable ties to release them from the bike)
 7. While supporting the fender, remove the 4 bolts from underneath, then remove fender along with the left/right signal and license plate light wires.
 8. Attach the LED license plate light to plate holder. Feed wires up through hole on plate holder. Attach adapter harness to LED plate light (Red>White wire and Black>Black wire)
 9. Mount tail light cover (padded side face up) to license plate holder using two (2) M6x12mm bolts, M6 washers and M6 lock nuts.
- Optional: Install turn signals - see below**
10. While feeding the license plate wires (and optional turn signal wires) up through the bikes underside, mount license plate holder to the bike using four (4) M6x20mm bolts and M6 washers. Apply a drop of loctite or thread sealer on these bolts. See illustration.
 11. Mount license plate to plate holder using four 6x16mm bolts, M6 large OD washers, and lock nuts from this kit.
 12. Reverse steps to reinstall the side covers, center under tail cover and upper tail light cover. Note: when installing the under tail replace the 2 rivets from this kit with the 2 middle rivets originally holding both the rear fender cover and under tail. See illustration on right.
 13. Check all lighting

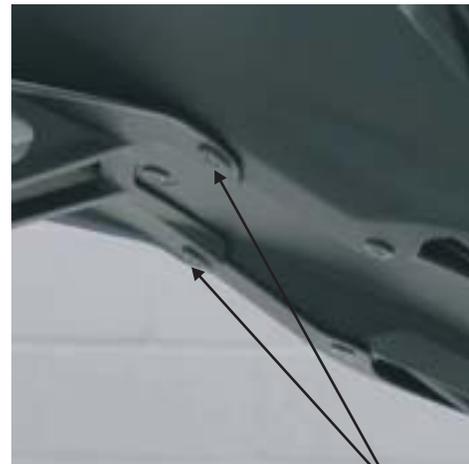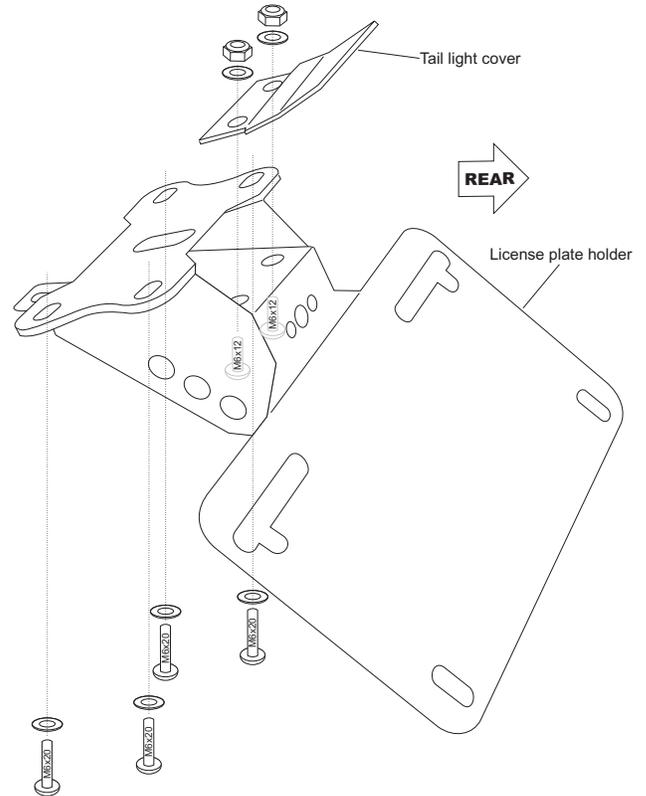

Replace these 2 rivets

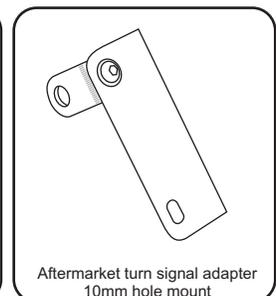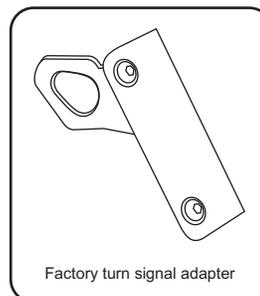

Optional Turn Signals: Mount OEM or aftermarket turn signal adapters to license plate mounting holes on plate holder using two/four M6x16mm allen bolts, large OD washers, and nuts. Install OEM or aftermarket turn signals onto adapter and route wires through feed holes and plug into appropriate plug removed from step 2. Aftermarket signals may require wiring. Refer to illustration on right to mount factory signals. Remove the OEM turn signals from the factory fender. OEM signals require de-pinning the connector in order to feed the wire through the feed hole, see video for steps on how to de-pin connector.