


2016-2018 Honda CBR500R/500X/500F
Installation Guide - Step by Step
Page 1 of 4

1. Remove passenger seat (key), remove rider seat (2 bolts under rear padding)



2. Remove rear fender (unplug L/R turn signals, license plate and tail light - then remove 4 bolts from the top) - carefully pull out the wires then support and drop the rear fender

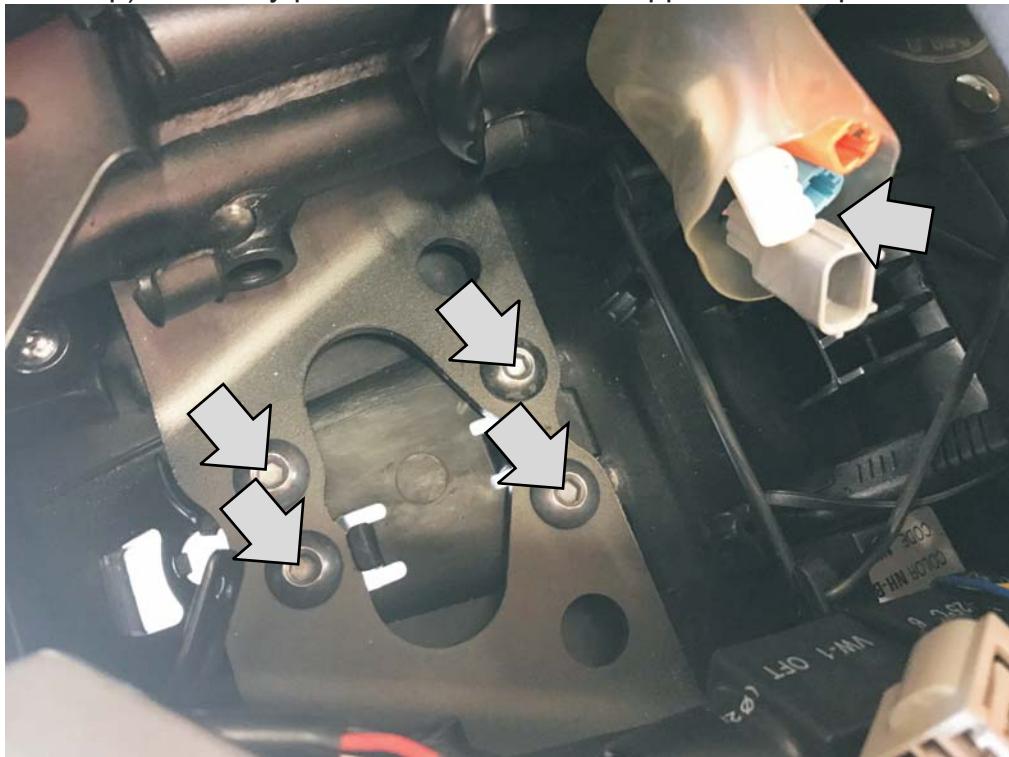

2016-2018 Honda CBR500R/500X/500F
Installation Guide - Step by Step
Page 2 of 4

3. Remove left and right black plastic side panels (1 plastic rivet and 1 bolt - panel is held in place by 4 rods and 1 hook at the front)



4. Unbolt the tail fairing, it will come off in 1 assembly (3 silver bolts at the top and 1 from each side)



2016-2018 Honda CBR500R/500X/500F
Installation Guide - Step by Step
Page 3 of 4

5. Unclip the front sides first by pulling outwards, then slide up and back the entire assembly. Remove upper tail light cover by sliding rearward and up.




6. Lower the black plastic undertail (1 black bolt on each side) and unclip from chassis near 4 bolts removed from step 2. Undertail will tilt down enough to remove tail light.



2016-2018 Honda CBR500R/500X/500F
Installation Guide - Step by Step
Page 4 of 4

7. Remove tail light (1 bolt from each side and 2 screws from the top)

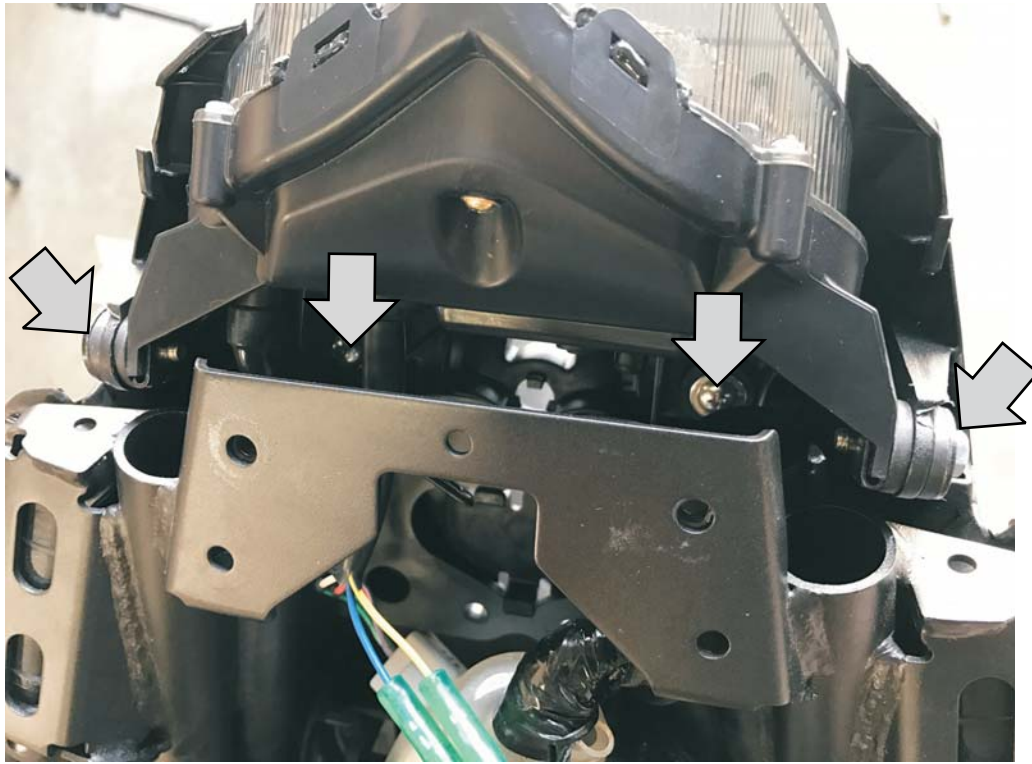

8. Transfer over the 2 side nut clips, 2 bushing/collars, 1 wire holder (not shown), and 1 rubber damper from the OEM tail light



9. Install the tail light back in reverse order and plug it in according to wiring instructions
10. Re-install everything in reverse order