


# Honda 03-06 CBR-600RR/ 04-07 CBR-1000RR Sequential LED Tail Light Installation Guide

## Part # H-6RR-C/S



>>2. Unscrew two screws holding bracket to upper tail. Remove bracket and swap over to new LED tail light. Take note the order of the washers. Locate and disconnect the factory signal connectors (blue and orange). Remove factory signals

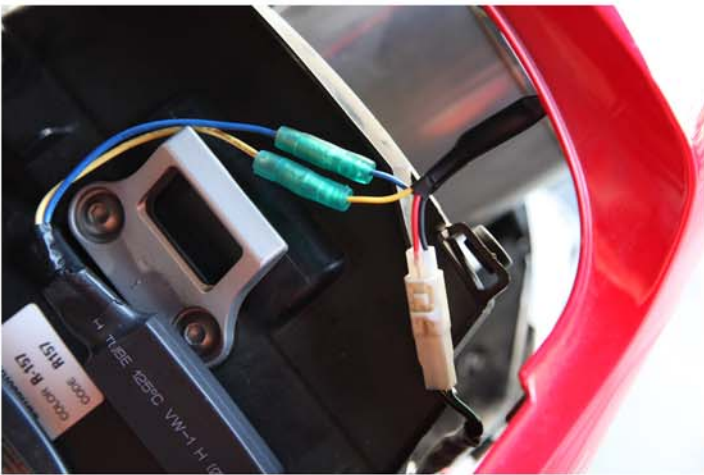

>>4. Connect the longer end of sub harness:  
Blue/Black to the Honda orange connector  
Yellow/Black to the Honda blue connector.  
Secure sub harness with cable ties, etc and reverse procedure for reinstalling the tail lamp. Test all functions before re-assembling upper tail.

\*For troubleshoot information please visit:  
<http://www.motodynamic.com/faqs>

Please download programming instructions here:  
[www.motodynamic.com/download](http://www.motodynamic.com/download)



### **Pre-installation Checklist:**

- Battery is in healthy and fully charged condition - may need engine on after installation to operate signals
- If aftermarket front LED signals are installed:
  1. Resistors must be installed on front to slow down the flash rate
  2. Disable any running/park lights if available
- Signals must be flashing at the stock OEM rate prior to install

<<1. Removing factory tail light. Seat removal needed (2 allen bolts and slide it out). Upper tail needs to be removed (4 allen bolts and gently pull up and back - remove left and right side covers first). Disconnect factory tail light harness.



<<3. Connect the sub harness shorter end to the blue and yellow wire respectively on the tail light, insulate with green cover. Connect main 3-wire harness.

