


# 98-05 Kawasaki ZR7(S)/ZX6R/ZX900/ZX9R/ZZR600 Sequential LED Tail Light Installation Guide Part# K-98Z7-C/S

## Bike Harness

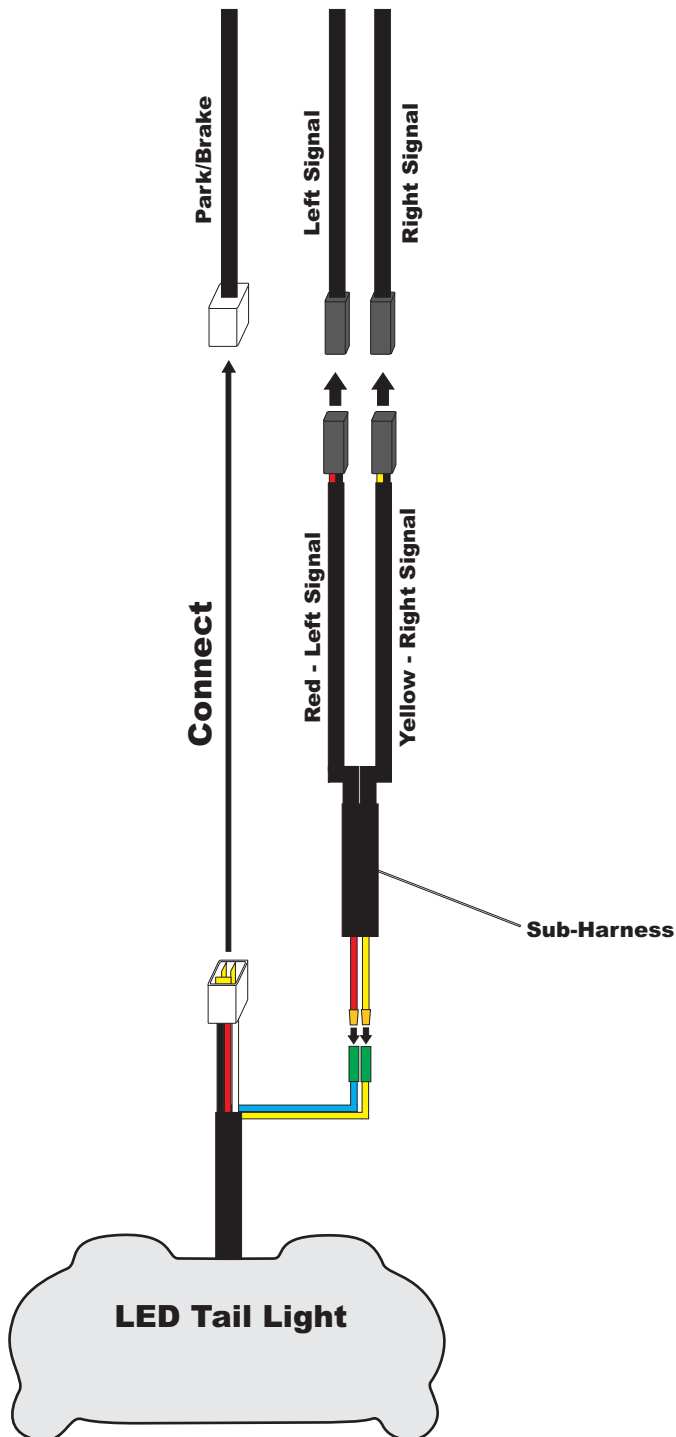

## **Pre-installation Checklist:**

- Battery is in healthy and fully charged condition - may need engine on after installation to operate signals
- If aftermarket front LED signals are installed resistors must be installed on front
- Signals must be flashing at the stock OEM rate prior to install

## **Park/Brake:**

Locate the main 3 wire harness from the bike and connect with the 3 wire connector on the LED tail light.

## **Sequential Signal:**

Using the supplied sub-harness, connect the yellow to yellow and red to blue wire on the LED tail light.

Connect the opposite end of the sub-harness to the bikes factory left and right signal connectors.

## **Note:**

Two resistors are wired inside the sub-harness. It is normal that these resistors get hot when the turn signals are activated.

\*For troubleshoot information please visit:  
<http://www.motodynamic.com/faqs>