


2025-2026 Triumph Daytona 660
 Sequential LED Tail Light Installation Guide
 Part# T-26D660-C/S

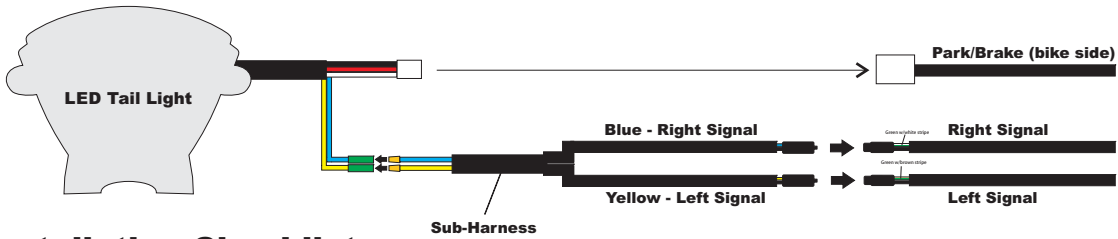

⚠ Pre-installation Checklist:

- Battery is in healthy and fully charged condition
- If aftermarket front LED signals are installed:
 1. Resistors must be installed on front to slow down the flash rate
- Signals must be flashing at the stock OEM rate prior to install

Park/Brake:

Locate the main 3 wire harness from the bike and connect to the Motodynamic LED tail light 3 wire plug. See illustration above.

Turn Signals:

Using the supplied sub-harness, connect the yellow and blue wire to the matching yellow and blue wire on the LED tail light. Insulate with green covers.

Connect the opposite end of the sub-harness to the bikes factory left and right signal connectors. The connectors are hidden inside the factory fender. Disassemble the fender and extract the turn signal/license plate light harness. See illustration below.



Triumph EDW compatible: When triggered, will flash the hazards unless brakes are engaged. Brakes have priority.
Hazard override: When hazards are activated and brakes are pressed, hazard will shut off until brakes are disengaged, then hazards will resume

Motodynamic Sequential LED Tail Light Programming Instructions

NOTE: It is recommended that the tail light is programmed prior to installation if the button cannot be reached after it is mounted to the bike. Simply connect the main harness to supply power to the tail light while the key is in the “ON” position.



1. Locate the fabric sticker on back housing and remove it to reveal the button underneath
2. Turn the key to the “ON” position, making sure the park lights are on
3. Using a non-metallic tool or similar tool to press the button consecutively within 1 second between each press to program the following:

- ON/OFF Stop Alert - hit button 3 times
- Toggles between Sequential, Reverse Sequential and Standard signals - hit button 4 times

The light will flash red for brake light programming or yellow for signal programming within 2 seconds to verify the settings have been saved. Stop Alert and Sequential Signals are defaulted ON out of the box.

4. Reinstall the fabric sticker

Note: Turning off Stop Alert will enable the brake light to be constant on during brake activation just like stock. Turning on Standard signals will allow the entire side to flash.

*For troubleshoot information please visit:
<http://www.motodynamic.com/faqs>