


2007-2013 Ducati 848/1098/1198 Sequential LED Tail Light Installation Guide Part# D-8SBK-C/S

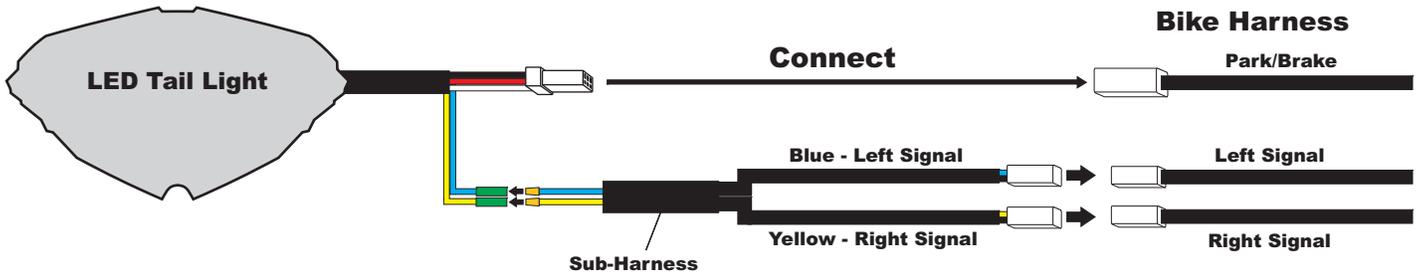

Pre-installation Checklist:

- Battery is in healthy and fully charged condition - may need engine on after installation to operate signals
- If aftermarket front LED signals are installed resistors must be installed on front
- Signals must be flashing at the stock OEM rate prior to install

Park/Brake:

Locate the main 3 wire harness from the bike and connect with the 3 wire connector on the LED tail light.

Sequential Signal:

Using the supplied sub-harness, connect the yellow to yellow and blue to blue wire on the LED tail light. Connect the opposite end of the sub-harness to the bikes factory left and right signal connectors.


Note:

Two resistors are wired inside the sub-harness. It is normal that these resistors get hot when the turn signals are activated.

*For troubleshoot information please visit:
<http://www.motodynamic.com/faqs>

LED Tail Light Programming Instructions (only on select models)

NOTE: It is recommended that the tail light is programmed prior to installation if the button cannot be reached after it is mounted to the bike. Simply connect the main harness to supply power to the tail light while the key is in the "ON" position.

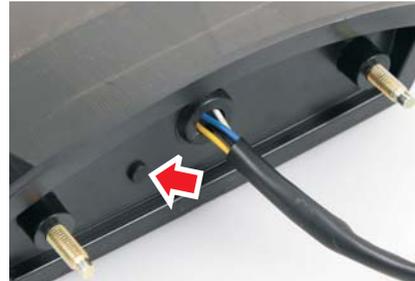

1. Locate the rubber plug on back housing and remove it
2. Turn the key to the "ON" position, making sure the park lights are on
3. Beneath the rubber plug is a push button, use a pin or similar tool to press the button consecutively within 1 second between each press to program the following:

ON/OFF License plate light (if available) - hit button 2 times
ON/OFF Stop Alert - hit button 3 times
ON/OFF Sequential Signals - hit button 4 times

The parking light (red) will flash off and on again within 2 seconds to verify the settings have been saved. The factory settings are defaulted to ON right out of the box for all functions.

4. Install the rubber plug back into the hole

Note: Turning off Stop Alert will enable the brake light to be constant on during brake activation just like stock. Turning off sequential signals will enable the entire left or right half to turn on when the signals are activated.

Voltage Stabilization Kit

Note: Only install this if you have voltage dropping/connection issues on your brake circuit.

Symptoms include:

1. While pressing and holding front and/or rear brakes and the engine is on/idle, brakes continue to flash randomly while stop alert is enabled.
2. While pressing and holding front and/or rear brakes and engine under high RPMs, brakes continue to flash randomly while stop alert is enabled.

Use the included T-Tap connectors and wire in the voltage stabilization kit black wire to the ground wire (black) and the white wire to the brake light wire (normally white) on the tail light main harness. If symptoms continue please contact us at sales@motodynamic.com

